



CL8 SERIES DIMENSIONS

Curved Jaw Coupling

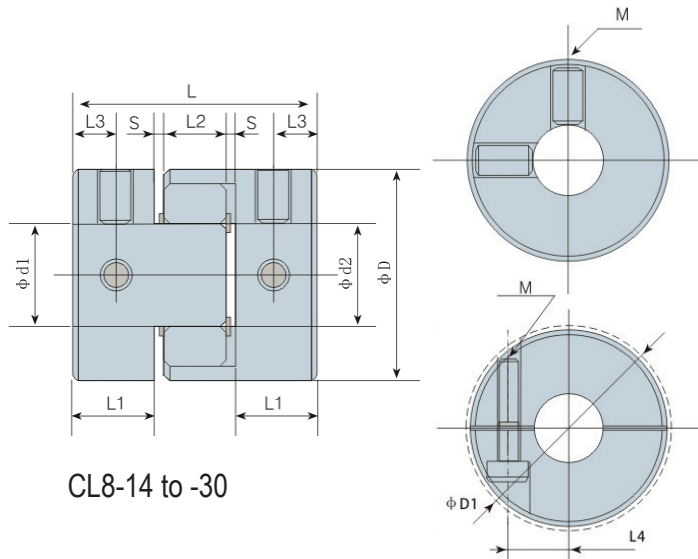

CL8-14 to -30

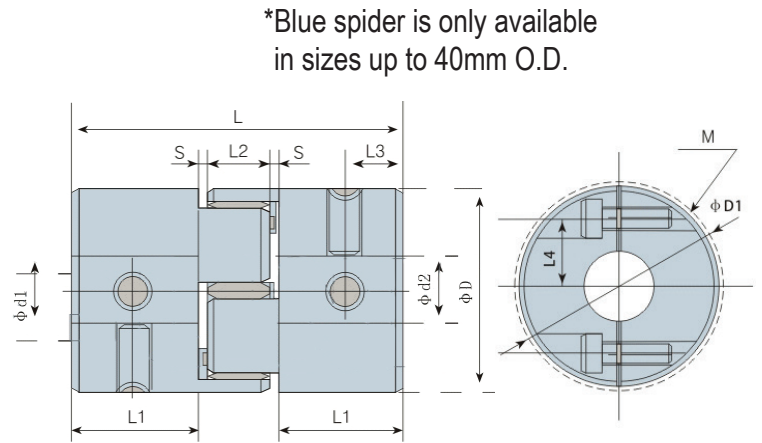

CL8-40 to -105

*Blue spider is only available in sizes up to 40mm O.D.

MODEL	BORE RANGE (ØD1-ØD2)		ØD	L	L1	L2	S	L3		M		WRENCH TORQUE	
	IN	MM						SETSCREW	CLAMP	SETSCREW	CLAMP	SETSCREW	CLAMP
CL8-14	0.12 – 0.28	3 – 7	14	22	7	6	1	3.5	3.5	M4	M2.5	0.7	1.0 – 1.1
CL8-20	0.20 – 0.39	5 – 10	20	30	10	8	1	5	5	M4	M2.5	1.9	1.0 – 1.1
CL8-25	0.24 – 0.43	6 – 12	25	34	11	10	1	5	5	M5	M4	3.7	1.5 – 1.9
CL8-30	0.31 – 0.62	8 – 16	30	35	11	10	1.5	5	5	M5	M4	3.7	1.5 – 1.9
CL8-40S	0.43 – 0.94	11 – 24	40	55	19.5	12	2	10	10	M6	M5	6.3	7.0 – 8.5
CL8-40	0.43 – 0.94	11 – 24	40	66	25	12	2	10	10	M6	M5	6.3	7.0 – 8.5
CL8-55	0.59 – 1.10	15 – 28	55	78	30	14	2	10	10.5	M6	M6	6.3	14 – 15
CL8-65	0.79 – 1.50	20 – 38	65	90	35	15	2.5	15	11.5	M8	M8	15	27 – 30
CL8-80	1.18 – 1.77	30 – 45	80	114	45	18	3	15	15.5	M8	M8	15	27 – 30
CL8-95	1.50 – 2.17	38 – 55	95	126	50	20	3	20	18	M10	M10	29.5	55 – 60
CL8-105	1.50 – 2.36	38 – 60	105	140	56	21	3.5	20	21	M12	M10	48	55 – 60
CL8-120	1.57 – 2.55	40 – 65	120	160	65.5	22	3.5	25	26	M12	M12	48	70 – 80
CL8-135	1.77 – 2.75	45 – 70	135	185	76	26	3.5	30	33	M12	M12	48	70 – 80

(1) If elastomer through holes are required, please specify when ordering. (2) For other bore sizes which are not listed above, customized ones are available, please consult us. (3) Standard bore tolerance is for the shaft with tolerance h7 or h8, if other tolerance is required, please consult us.